

M-82(W)G2 / M-82A(W)G2

8" Two way active installation loudspeaker (vented)

M-82(W)G2延续了M系列熟悉的紧凑型设计，能与M-62(W)G2系列配合使用，产品设计独具魅力，箱体采用了坚固的中纤板及非常耐用的撒点漆；M-82(W)G2是极佳的全频音箱，深沉得低音，宽广的频响，使得音质得到精准的再现，可作为一款阻抗8Ω的无源音箱独立使用。白色可选。

M-82A(W)G2是一款集成80W A / B类功放有源音箱。智能化的SMB铝支架确保了最佳的安装灵活性及角度可调性。白色可选。


M-82(W)G2 Allround Installation Loudspeaker
M-82(W)G2 which features the well-known and compact design of the M series is the powerful alternative to M-62(W)G2 speaker systems. The attractive design features a sturdy MDF housing and a very durable textured finish. The M-82(W)G2 is an excellent full range speaker with a deep bass fundament and a large frequency range which enable a very precise sound reproduction. White colour is available!

M-82A(W)G2 Allround Sound Box. It is also available as an active version with an integrated 80W Class A / B amplification module. Installation is ensured by the included SMB(Smart-Mounting-Bracket).

1 应用领域 Application

- 咖啡厅 Cafes
- 小餐馆 Bistros
- 小型会议 Small-scale meeting
- 时装店 Fashion shop

2 结构图 Structural diagram

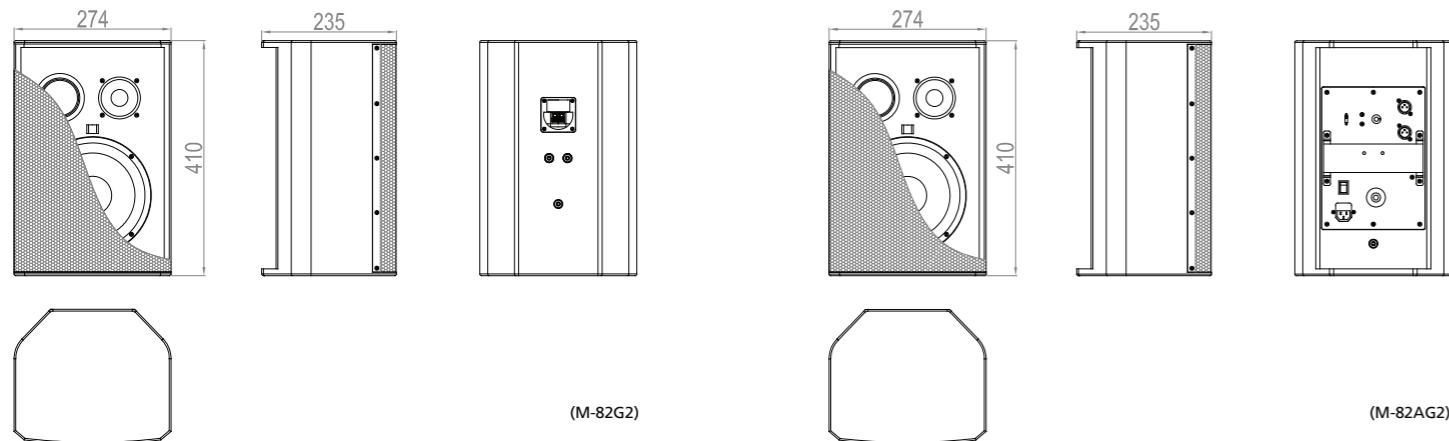

3 参数规格 Specification

型号名称: M-82(W)G2	Model: M-82(W)G2
类型: 8"无源二分频音箱(倒相式)	Type: 8" two way passive loudspeaker (vented)
频率范围(-6 dB): 50 Hz - 20 kHz	Frequency response (-6 dB) : 50 Hz - 20 kHz
功率(额定 / 峰值) (AES): 120 W / 200 W	Power output (RMS / Peak) (AES) : 120 W / 200 W
灵敏度(1 W / 1 m): 93 dB	Sensitivity (1 W / 1 m) : 93 dB
最大声压级(1 m): 114 dB	MAX SPL (1 m) : 114 dB
阻抗: 8 Ω	Impedance: 8 Ω
指向角度 (H × V): 60° × 60°	Dispersion (H × V) : 60° × 60°
低音单元: 8"铁氧体单元, 1.5"音圈	LF Transducer: 8" ferrite magnet, 1.5" voice coil
高音单元: 钕磁丝膜单元, 1"音圈	HF Transducer: Neodymium magnet, 1" voice coil
输入 / 输出接口: 夹式连接	Input Interface: Clamp Connection
吊挂系统: 3个M6吊挂点	Rigging System: 3× M6 rigging points
箱体材料 / 喷漆: 12 mm MDF / PU 撒点漆	Cabinet Material / Coating: 12 mm MDF / PU texture coating
尺寸(W × H × D): 274 × 410 × 235 mm	Dimensions (W × H × D) : 274 × 410 × 235 mm
净重: 7.0 kg	Net Weight: 7.0 kg
可选附件: 见附件页面	Available Accessory: See accessories page

型号名称: M-82A(W)G2	Model: M-82A(W)G2
类型: 8"有源二分频音箱(倒相式)	Type: 8" two way active loudspeaker (vented)
频率范围(-6 dB): 50 Hz - 20 kHz	Frequency response (-6 dB) : 50 Hz - 20 kHz
功率(额定/峰值) (AES): 80 W	Power output (RMS / Peak) (AES) : 80 W
灵敏度(1 W / 1 m): 93 dB	Sensitivity (1 W / 1 m) : 93 dB
最大声压级(1 m): 114 dB	MAX SPL (1 m) : 114 dB
阻抗: 4 Ω	Impedance: 4 Ω
指向角度 (H × V): 60° × 60°	Dispersion (H × V) : 60° × 60°
低音单元: 8"铁氧体单元, 1.5"音圈	LF Transducer: 8" ferrite magnet, 1.5" voice coil
高音单元: 钕磁丝膜单元, 1"音圈	HF Transducer: Neodymium magnet, 1" voice coil
输入 / 输出接口: 输入: XLR / 6.3 mm jack, 输出: XLR	Input interface: Input: XLR / 6.3 mm jack, Output: XLR
吊挂系统: 3个M6吊挂点	Rigging system: 3× M6 rigging points
箱体材料 / 喷漆: 12 mm MDF / PU 撒点漆	Cabinet material / Coating: 12 mm MDF / PU texture coating
尺寸(W × H × D): 274 × 410 × 235 mm	Dimensions (W × H × D) : 274 × 410 × 235 mm
净重: 9.7 kg	Net weight: 9.7 kg
可选附件: 见附件页面	Available accessory: See accessories page